


# DUNE MAX / fine texture



DUNE MAX Angled Tegular with Prelude XL 24mm Exposed Tee Grid

## Armstrong Grid Options with DUNE MAX

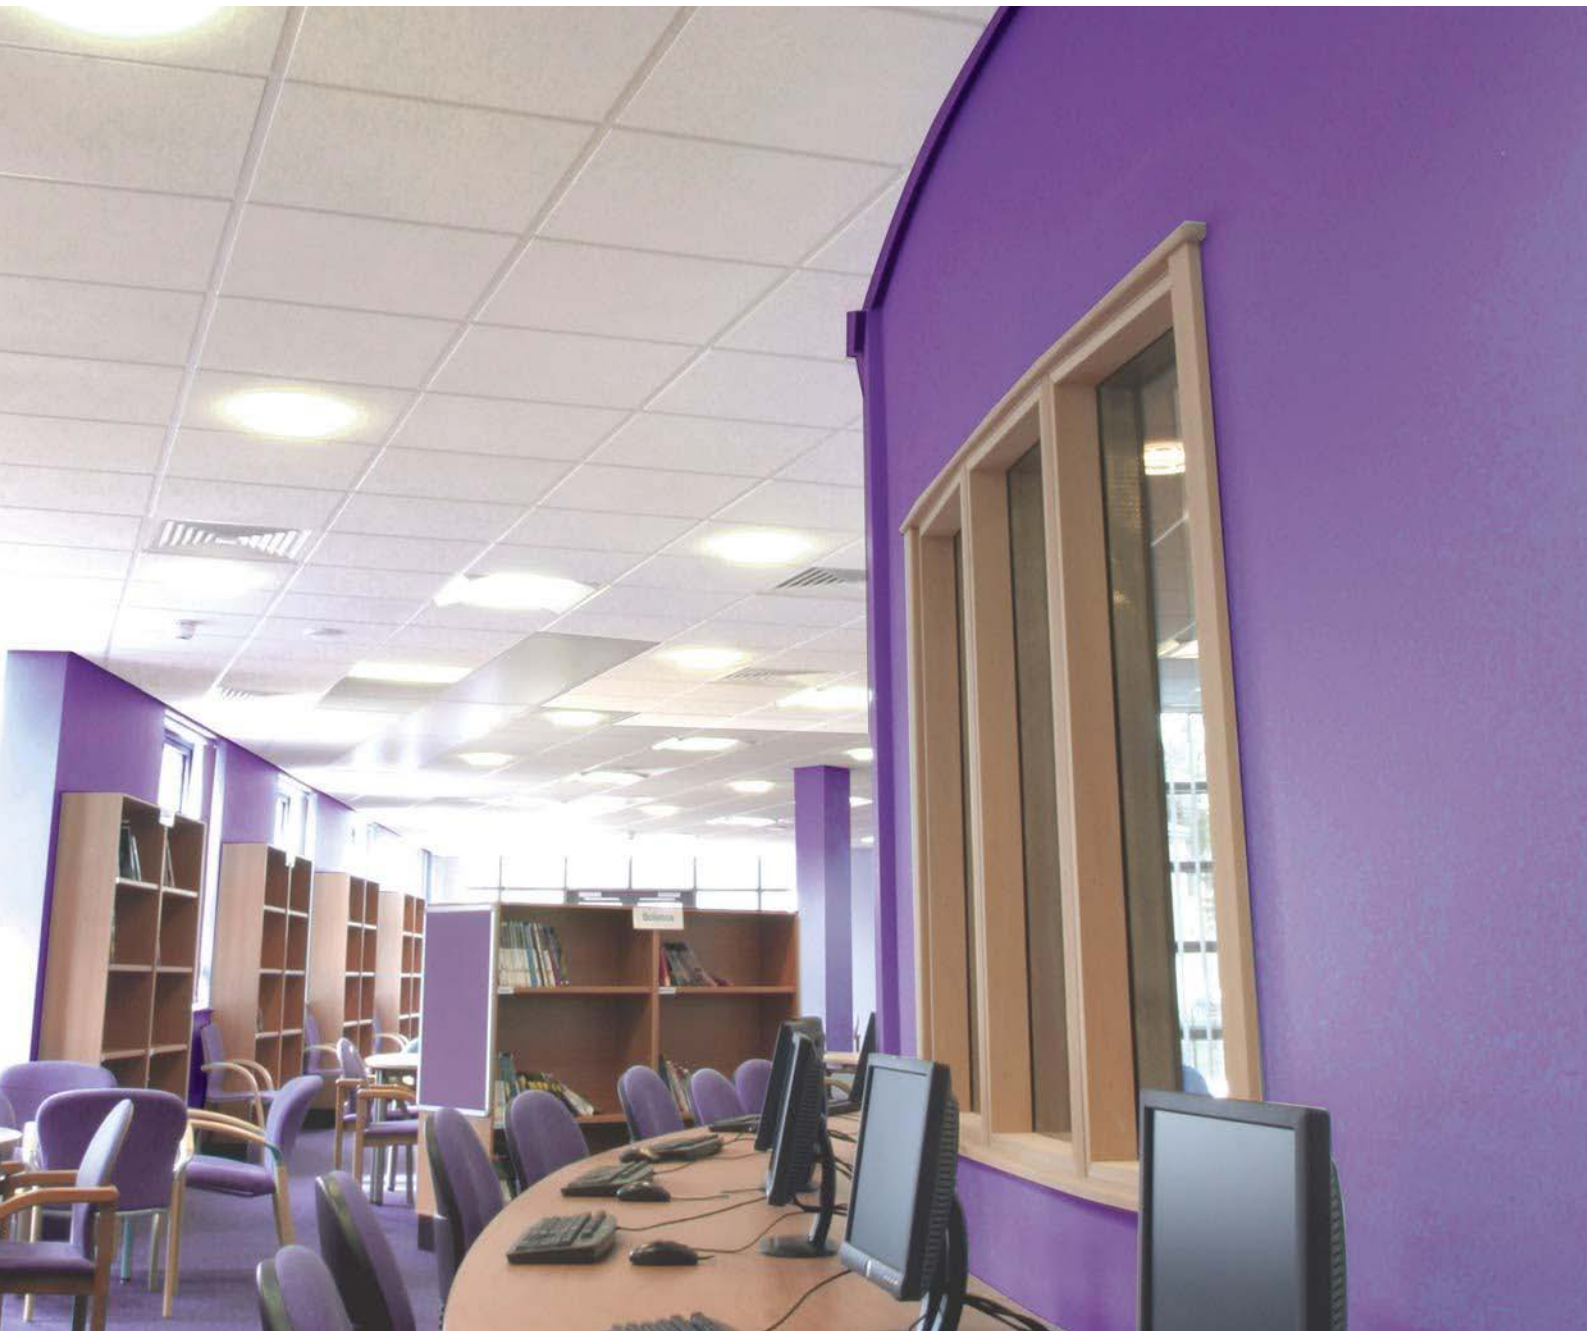


DUNE MAX Square Edge with Peakform 24mm Exposed Tee Grid




DUNEMAX Tegular Edge with Supratine 15mm Exposed Tee Grid




DUNE MAX Tegular Edge with Silhouette 15mm Grid




DUNE MAX K2C2 / Square Edge with Aluminium Top Hat Modular Grid




Square Lay-in with PeakForm Grid




Angled Tegular with PeakForm Grid



Beveled Tegular with Supratine XL Grid



Beveled Tegular with Silhouette Grid



K2C2 Edge and Top Hat Grid



# DUNE MAX / fine texture



## Sustainable Performance

- GLOBAL GREEN TAG<sup>cert</sup>™ Certified Product:
  - Achieving Green Rate Level A: Certified to provide 100% Credit Points in the GBCA & NZGBC Green Star Materials Calculators
  - IEQ; Contributes to the “Low VOC Emission” credit
- ISO 14001 EMS compliant manufacturing
- Listed by Ecospecifier, and deemed to be of an eco-preferable nature and likely to contribute to the achievement of various Green Star points:
- Recycled Content 74% PeakForm Grid: 25%
- Fully Recyclable at end of life:

## Key Selection Attributes

- Upgraded look at a modest price
- High Acoustic performance
- Appealing fine textured surface
- High light reflectance
- Durable Scrubbable Scratch-resistant
- **HumiGuard Plus** performance – Sag-resistant formulation to withstand temperatures between 0°C–49°C and relative humidity up to 99%
- **BioBlock™ Plus** paint on face and back of HumiGuard panels to inhibit or retard growth of mold/mildew and bacteria on painted surface

## Typical Applications

- Schools
- Call Centres
- Healthcare
- Open plan areas
- Open plan offices

## Visual Selection

## Performance Selection

Grid Face	Edge Profile	Item Number	Dimensions	Acoustics		Anti-Mold/ Mildew	Sag Resist	Light Reflect	Installed Cost	
				NRC/Alpha W	CAC/Dnfw					
<b>DUNE MAX</b>										
15mm	Beveled Tegular	4988S	600 x 600 x 20mm		0.70/0.70	30/29*			0.85	\$\$
		4989S	600 x 1200 x 20mm		0.70/0.70	30/29*			0.85	\$\$
24mm	Angled Tegular	4984S	600 x 600 x 20mm		0.70/0.70	30/29*			0.85	\$\$
		4985S	600 x 1200 x 20mm		0.70/0.70	30/29*			0.85	\$\$
	Square Lay-in	4980S	600 x 600 x 20mm		0.70/0.70	30/29*			0.85	\$\$
		4981S	600 x 1200 x 20mm		0.70/0.70	30/29*			0.85	\$\$
32mm	Top Hat Grid	K2C2 Edge with Concealed Spline*	400 x 1200mm 450 x 1350mm 500 x 1500mm Other		0.70/0.70	30/28			0.85	\$\$

- Other sizes available upon request.
- \* Dune Max is also available with NRC 0.65, CAC 35 Performance.

## Physical Data

**Material**  
Wet-formed mineral fiber

**Surface Finish**  
Factory-applied acrylic latex paint with “BioBlock™ mold/mildew inhibitor”

**Flame Spread/Fire Resistance**  
Conforms to BCA Spec. C1.10 and tested to AS/NZS 3837: 1998 – “Group 1” AS/NZS 1530.3

**Thermal Resistance**  
R Value: 0.40 m²K/W

**Anti Mold / Mildew & Bacteria**  
“BioBlock™ Plus” contains an antimicrobial treatment, providing resistance against growth of mold/mildew and Gram-positive and Gram-negative odour/stain causing bacteria.

**Weight**  
• DUNE Max: 4.54 kgs/m²

**Recommended Suspension System**

Items	Suspension System
4980S 4981S 4984S 4985S	24mm Peakform Exposed Tee
4988S 4989S	15mm Suprafine Exposed Tee 15mm Silhouette Grid

Other Armstrong suspension systems, including, “Blue Tongue” Aluminium, available upon request.

